

Features:

- compact and corrosion-resistant sewage water submersible pump
- including floating tap and check valve
- fixed vertical float switch
- with built-in compressor
- connecting cable, 10 m long

Application:

- feeder pump for rainwater modules with long
- suction lines and bigger suction heights
- supply of service water

Scope of delivery:

- 10 meter connection cable



Product benefits:


- versatile usage
- automatic operation with defined switch points by fixed, vertical float switch
- intake of the cleanest water by supplied floating intake
- LAB-LIP-SEAL system - the motor is protected by three lip seals

Technical data:

Art.no.	U [V]	P ₁ [W]	I _n [A]	n [min ⁻¹]	Q _{max} [m ³ /h]	H _{max} [m]	P0	L [mm]	W [mm]	H [mm]	Weight [kg]
19096	230	780	3,5	2850	13,5	11,0	RP1	221	221	285	10

Characteristics:

H (m)

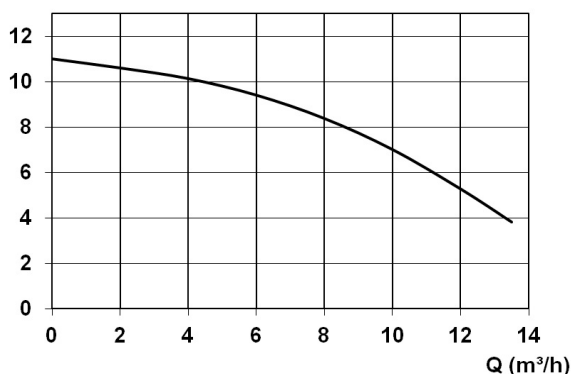


Materials:

Material motor housing:

stainless steel AISI 304

Example of installation:

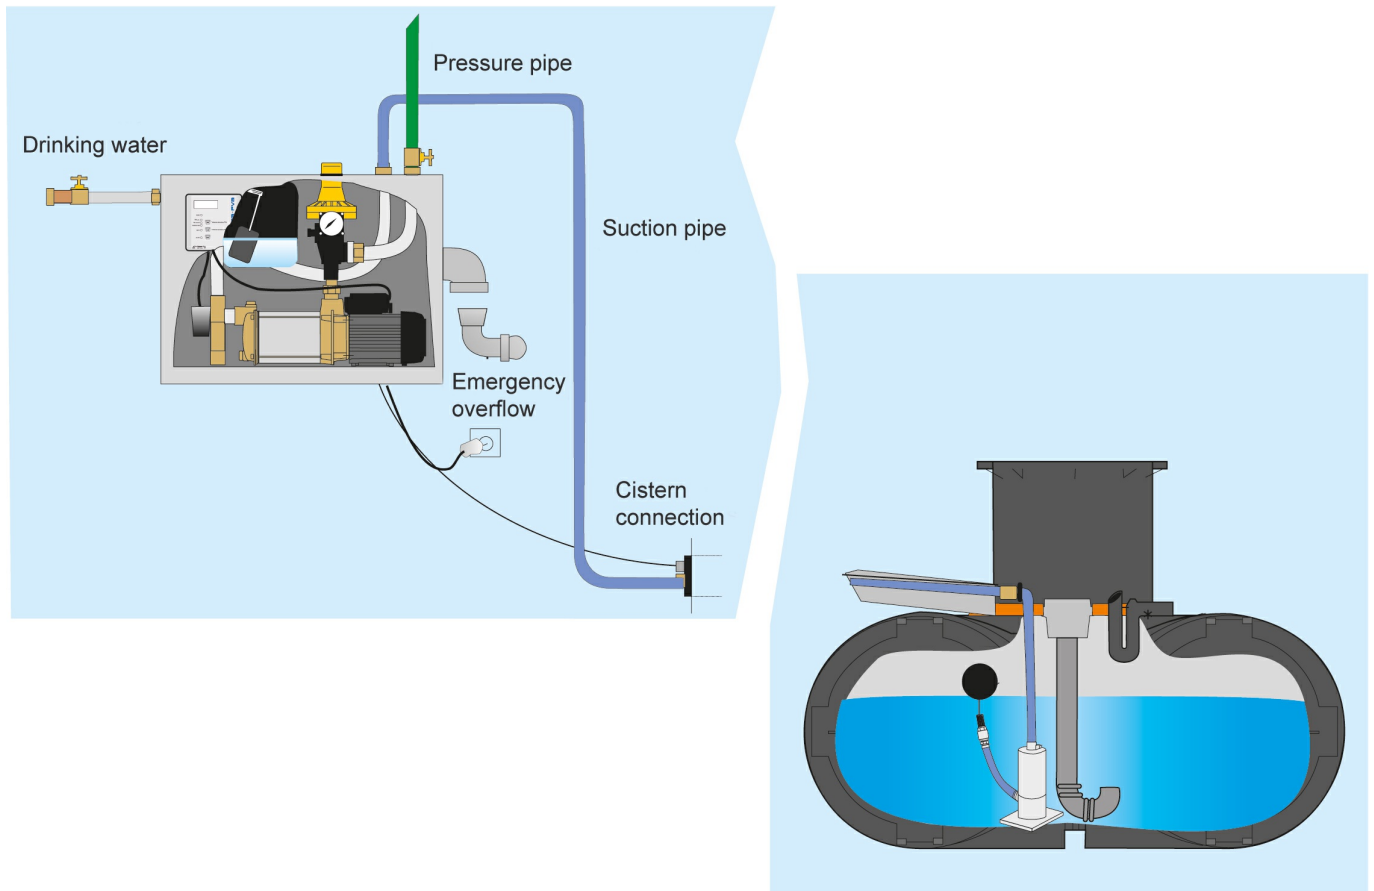

Dimensions:

